




## Submittal Information

United Ballcorp Corporation Stop

AWWA/CC Tapered Thread x Grip Joint Compression (CTS)

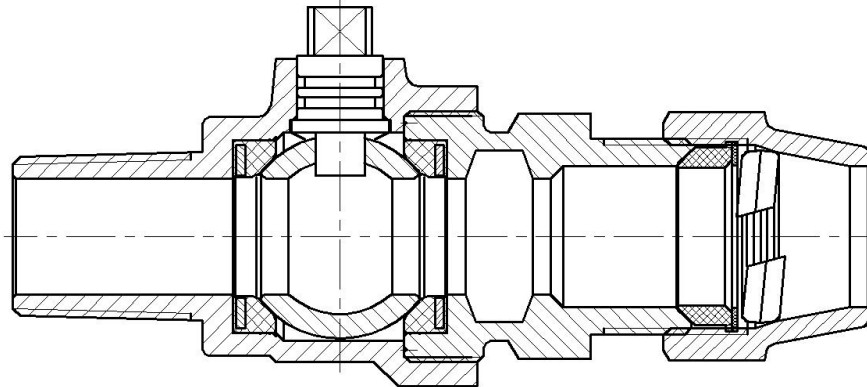

Valve Size	Inlet Size	Outlet Size	Weight Lbs.	Length	Part Number
3/4"	3/4"	3/4"	2.07	4-19/64"	CV3BTTG - NL
1"	1"	1"	2.74	4-1/2"	CV4BTTG - NL

➤ Pack Joint Nuts are available upon request

### Features

- All brass parts that come into contact with potable water conforms to AWWA Standard C800 (UNS C89833)
- Components that do not contact potable water conform to AWWA Standard C800 ( ASTM B-62 and ASTM B-584, UNS NO C83600 – 85-5-5-5 )
- Classified to ANSI/NSF 61 and Annex G
- The product has “NL” letters cast into body of fitting for proper identification
- Valve is non-directional and is watertight with flow in either direction
- Ends are integral or secured with adhesive to prevent unintentional disassembly

Utilities Supply, Inc.

575 Loganville Hwy

Winder, GA 30680

Website: [utilitiessupply.com](http://utilitiessupply.com)

Email: [sales@utilitiessupply.com](mailto:sales@utilitiessupply.com)